


## AATi Recommended Installation Guidelines For Retro-fitting SN9/65B nosings to concrete




Installation Guideline: SN9/65B®	
DATE: Jun 2016	ISSUE: 2
Type: 2 Inch woodscrew into concrete	


1. Check surface is sound and level.
2. Make good any worn or damaged areas or uneven surfaces with Ardex A46 or similar authorised rapid setting and hardening repair mortar (as below).

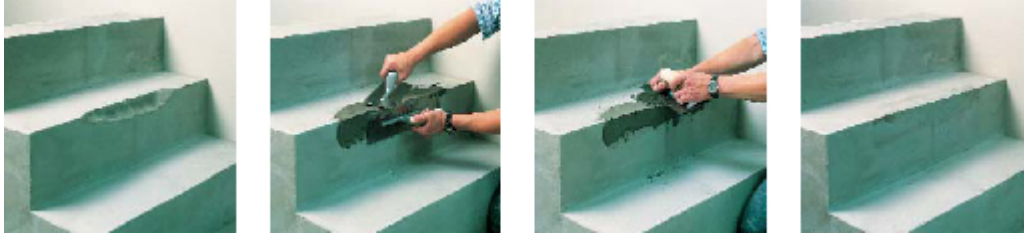

3. Position AATi nosing onto step in correct position.
4. Spot through holes using 7mm Masonry drill bit.
5. Lift off nosing and drill pilot holes through spotted positions with 7mm Masonry drill bit to an appropriate depth of approximately 50-55mm.
6. Clean out dust/dirt from hole.
7. Insert Brown Rawplug.
8. Apply Damp Proof Course (Rubberoid - Hyload original DPC) to cover the entire interna face of the nosing.
9. Place nosing back into position on step and ensuring it is fully supported. Fix by inserting appropriate length (2inch) countersunk pozi screw and tighten to form a secure fixing.

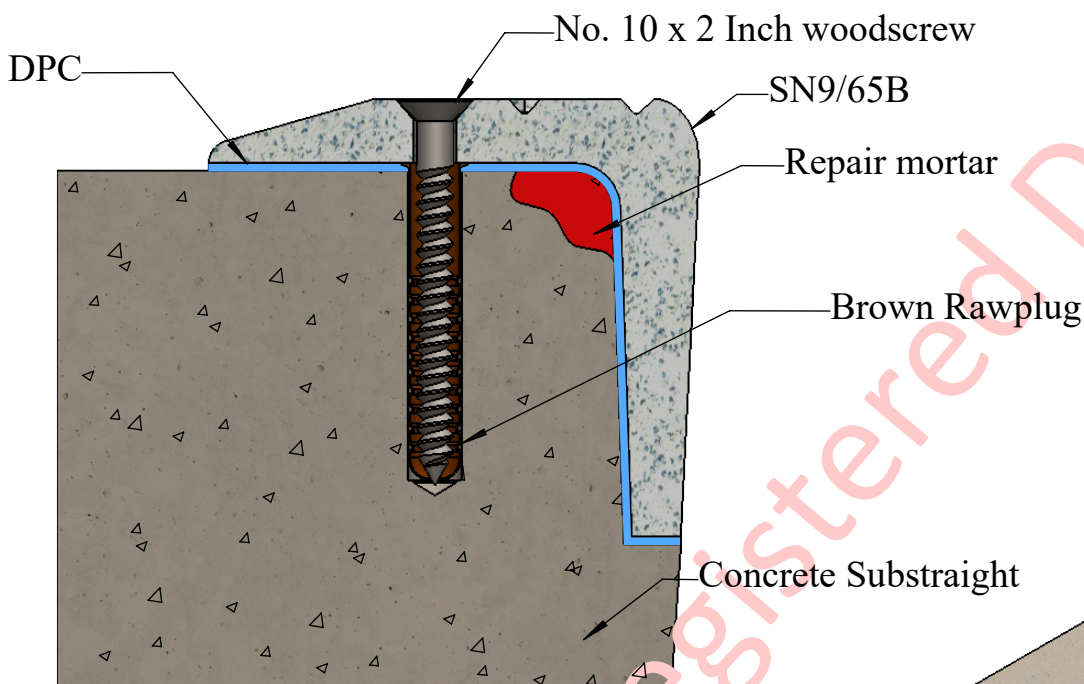

Section view - Scale 1:2

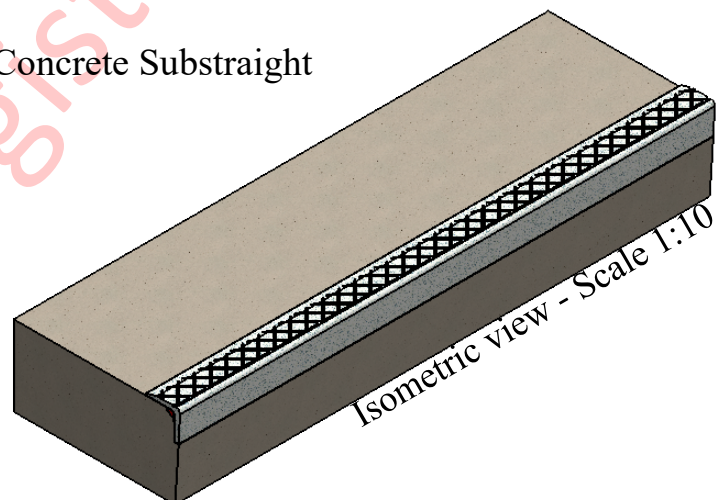

Isometric view - Scale 1:10

Special attention should be given to installation & drainage of this product. For further advice please speak to a member of AATi's technical department.  
Dimensions shown are nominal and subject to AATi manufacturing tolerances.